

> 132,000 lm for less than 10 kg - 22 lbs

sirocco 1300 Redtech




NEW



> lighting data

Open core area lighting requirement (EN 1838 standard)	6,500 m ² 69,965 ft ²
Very low risk area lighting requirement for safety and security (EN 12464-2 standard)	1,963 m ² 21,129 ft ²
Light under the balloon (4 m - 13,12 ft high)	704 lx - 65 fc
Maximum lumen	132,000 lm
Colour temperature: daylight	5,000 K

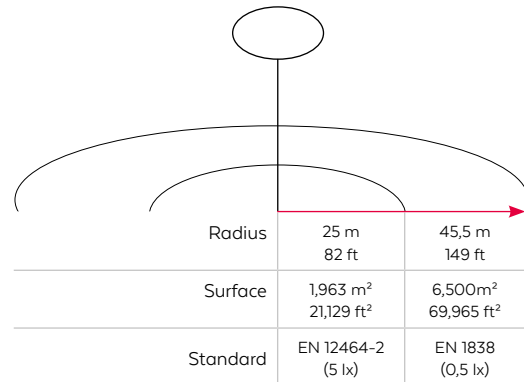

> technical data

Light Engine	Airstar LED Matrix : 24 x 5 500 lm
Average LED life*	50,000 h
Maximum power	920 W
Efficiency	143 lm/W 14,042 lm/kg - 6,373 lm/lbs
Available voltage	100-240 VAC / 50-60 Hz
Power supply	main power or 2 kVA generator
Envelopes options	multiple envelope colours, without reflector or with reverse reflector
Wind resistance of the balloon	100 km/h - 60 mph

Flame-retardant fabric

* Under normal conditions of use

> Redtech

Certifications	IEC-60598-1, CE, IP54
Maximum Mesh range between two balloons	100 m - 109,3 yd
Smart Light Control	Airstar Light App

> dimensions and packaging

Envelope size	ø 138 cm / h 77 cm ø 54 in / h 30 in
Net weight of the balloon	9,4 kg - 20 lbs
P500TA stand height	from 160 to 530 cm from 5 to 18 ft
Transport bag	L 108 x w 30 x h 30 cm L 42 x w 11 x h 11 in

Content: full set lighting balloon, 1 transport bag, 1 user's guide, 1 envelope repair kit. Stand and sand bags optional.

AIRSTAR LIGHT APP



aIRSTAR



www.airstar-light.com